





## Instruction F3 UXO Coil Change 4901-0079 rev 2, July 2013



12. Thread coil cable through the shafts. A piece of string can be used.



13. Mount the coil to the shaft.



14. Fit Coil Cable Pin




15. Connect the Coil cable and fit the retainer plug.




16. Slide the Electronics Pack back into place, **replace two screws.**



17. Carefully connect the Wiring Loom.

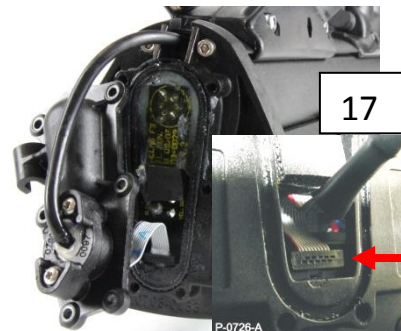

18. Replace cover and insert **six screws.**

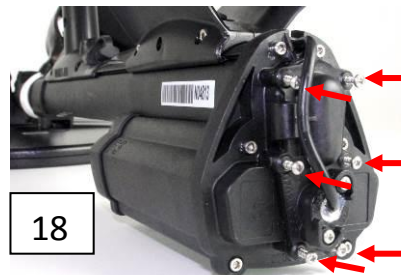

20. Connect Endcap and Battery Pack then check and test the F3 UXO Detector.

For Technical use only – Refer to Service Manual [www.minelab.com/aus/countermine/maintenance](http://www.minelab.com/aus/countermine/maintenance)